

FIN Oak

Engineered Hardwood Flooring



Finoak 15/4mm Clear 190

Plank dimensions : 1900 x 190 x 15/4mm (2.888m² per box)


by
FINfloor™
www.finfloor.co.za

FIN Oak

Engineered Hardwood Flooring

FINOAK 15/4mm UNFINISHED		
Length	1900 mm	
Width	190 mm	
Thickness	15 mm	
Top surface	4 mm	
Tolerance	Length	+/- 1.0 mm
	Width	+/- 0.2 mm
	Thickness	+/- 0.2 mm
	Gap	≤ 0.20 mm
	Height difference	≤ 0.15 mm
	Cup warping concave	≤ 0.15%
	Cup warping convex	≤ 0.2%
	Bow warping concave	≤ 0.2%
Bow warping convex	≤ 0.4%	

CLEAR GRADE - UNFINISHED

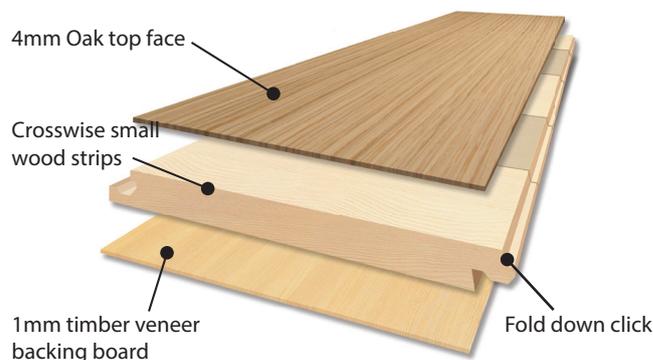

Planks are supplied **unfinished**.
Finishing with our preferred
finishing and oiling partners -



FINOAK 15/4 UNFINISHED TECHNICAL SPECS	
General Construction	3 ply layer
Timber Specification	Oak
Grade	Clear
Core & Back	Poplar
Face Finish / Colour	Unfinished
Locking System	Waxed Fold Down Click system

LAB TEST to STANDARDS			
Test	Standard reference	Requirement	Test Data
Moisture Content	EN 13183-1	7±2%	7,90%
Width - permit.deviation	EN13647	±0.2 mm	0 mm
Reaction to fire	EN13501-1		Dfl-S1
Release of formaldehyde	EN717-1	≤0.124 mg/m ³	≤0.009 mg/m ³
Emission of pentachlorophenol	CEN/TR 14823	≤5 ppm	≤5 ppm

Accuracy of colour and wood characteristics: whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are as accurate as possible these images may vary from the actual product.

Clear grade is selected from the fine grain wood found around the center core of the log where there are no knots. Each tree produces fewer clear grade planks and is therefore more expensive. Exposed central core is allowed. Oak grain pattern is exposed which will or may could cause colour unevenness.

